

## TEST RESULTS

**Statement:** The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test, they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.


**Warning:** This classification report does not represent type approval or certification of the product, the test laboratory has therefore play no part in sampling the product for the test, although it holds appropriate references to the manufacture factory production control that is aimed to be relevant to the sample tested and that will provide for their traceability.

### Annex A

Classes of reaction to fire performance for floorings

Class	Test methods	Classification	Additional Classification
A	ASTM E84	FSI:0-25 and Smoke developed index < 450	---
B	ASTM E84	FSI:26-75 and Smoke developed index < 450	---
C	ASTM E84	FSI:76-200 and Smoke developed index < 450	---

# SAMPLE PICTURES

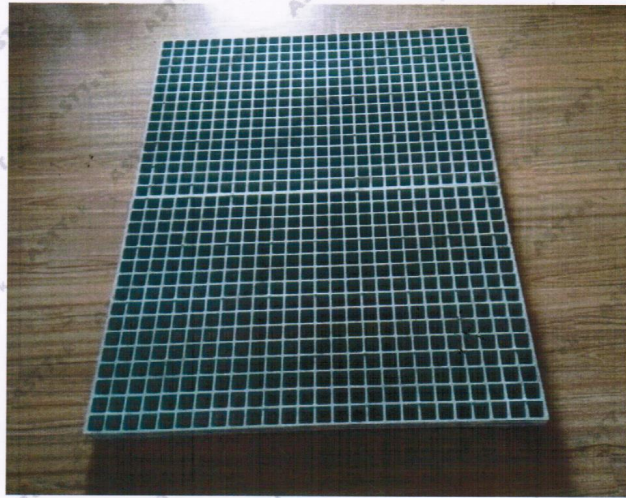

## STATEMENT

1.We promise all the test data are correct and true,the client can request re-test within one week,if doubting the test result.

2.All the information for the samples will be protected by us ,no any will be leaked out.

3.The samples can be kept in our lab for one week,later it will be disposed based on the regulation of the Lab.

4.The test result of the samples are the reference only,we are not responsible for other products.

5.When disputing,the client can request Jiangsu arbitration commission to handle it.